






DT-7000

i58

Compact Cash Recycler



i58 Cash Recycler is a newly designed Cash Recycler developed by GRGBanking. Featured with cost-effectiveness, high-security, improved stability by using brand-new Cash Processing Module, i58 meets various cash processing demands by enhancing human-computer interaction and user experience.

58 Compact Cash Recycler

Features

Full Functionality & Leading Technology: Cash recycling for multi-denominations Full image scanning of banknotes with 50% faster processing speed by new cash processing module.

Flexible Deployment & Easy Maintenance: Compact size, 40% less floor space, more flexible to deploy. Visual guidance interface for maintenance, easy to identify problem and operate.

Comprehensive Security Design: Fully monitored and recorded the cash loading process. Banknote Series Number Tracking System, fast locate suspicious banknotes. Anti-skimming Card Reader.

Specifications

Controlling Unit

- Embedded X86 platform
- 4G Memory
- 500G HDD (opt. 1G SSD)
- Windows® 7

Banknote Processing Unit

- Cash recycler: 8 notes/sec for processing
- Bulk cash processing: Max.300 notes per transaction
- Capacity:
 - -2 dual recycling cassette (1,800 notes each);
 - -1 acceptance cassette (2,850 notes)
- Support note retract & reject (opt.)
- 3 dual recycling cassette (opt.)

Customer Interfaces

- Display:
 - -15" TFT touch screen, privacy filter(opt.)
- Card reader:
- -Support IC card/ Magcard;
- -Motorized Card reader PS (opt.)
- -RF card (opt.)
- Receipt Printer:
- -Mini thermal printer;
- -support graphic/ASCII
- Keypad:
 - -EPP:
 - -Dust proof/water proof/vandal resistant
- Fingerprint reader (opt.)
- 2D barcode scanner (opt.)

Communication

- Standard TCP-IP connection
- Support Ethernet/LAN, wireless 3G or 4G

Security

- Split type double mechanical combination lock
- Standard UL291 Level 1 safe
- Electronic combination lock (opt.)
- DVR surveillance system (opt.)
- UPS (opt.)

Working Environment

• Temperature:


Indoor: 32°F (0°C) to 104°F (40°C)

• Relative humidity: 20% to 95% non-condensing

Dimensions & Weight

• Height: 63.2 in. (1605mm) Width: 17.7 in. (450mm)

• Depth: 27.2 in. (690mm) Weight: 255kg

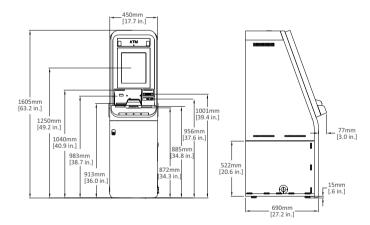

^{*}The actual capacity is subject to the thickness and fitness of local currency.















GRGBanking Equipment Co., Ltd.

9,11 Kelin Road, Science City, High-tech Industrial Development Zone, Guangzhou, China 510663 Tel: +86-20-6287 8545 Fax: +86-20-6287 9976

Fax: +86-20-6287 9976 E-mail: atm@grgbanking.com Specifications are subject to update without prior notice.
Please consult GRGBanking or its representative for the latest information.